
Cobalt

The Cobalt is equipped with a high-performance pressure washing system driven by a twin cylinder engine, featuring an adjustable thermostat for temperature control. It utilizes a reliable Wayne combustion burner with automatic electronic ignition, as well as a double insulated heating coil system in stainless steel housing. Heating of the pressurized water is done effectively with a diesel fired heating system.



UNIT INCLUDES

- Pro gun handle rated 320° F
- 48" Insulated grip lance with 1/4" QC
- 3/8" x 50' Steel braided Armor HoseTM
- Stainless steel 15°, 25°, 40° and aluminum soap QC nozzles
- Downstream detergent injector

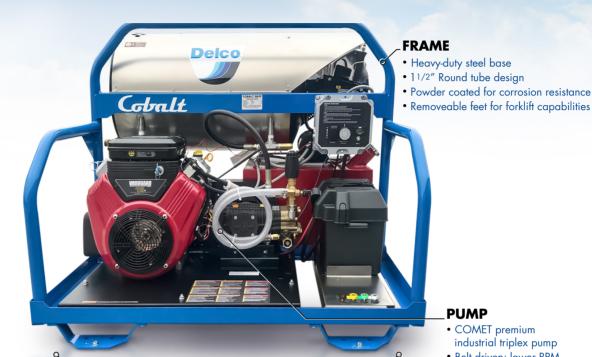

FEATURES

- NEMA 4X electrical enclosure with rocker switch, thermostat control and hour meter
- 1/2" Schedule 80 coil piping
- Electric start V-twin engine
- Stainless steel coil cover
- Isolated pump & engine plate with vibration dampeners
- · Large capacity engine & burner fuel tanks

PUMP

- COMET premium industrial triplex pump
- Belt driven; lower RPM
- Axialign™ Adjustment System allows the alignment and high pressure pump maintenance to be easily accomplished with a single bolt adjustment
- Overpressure safety relief valve

DIMEN	SIONS
Depth	4] 3/4"
Width	45 1/4″
Height	37 1/8"

*Optional float tank and additional fuel tanks available

MODEL#	ENGINE	PUMP	PSI	GPM
65001	VANGUARD® 570cc	COMET	3500 PSI	5.5 GPM
65002	HONDA® GX630	GENERAL PUMP®	3500 PSI	5.5 GPM
65003	KOHLER® CH620	COMET	3500 PSI	5.5 GPM
65004	HONDA® GX630	GENERAL PUMP®	4000 PSI	5.0 GPM
65005	VANGUARD® 570cc	COMET	4000 PSI	5.0 GPM
65006	VANGUARD® 570cc	GENERAL PUMP®	3500 PSI	5.5 GPM

FNA GROUP 7152 99th St., Pleasant Prairie, WI, 53158 Contact: (847) 348-1500 www.delco-cleaning.com

